


TECHNICAL DATA	
temperature max	90°C
pressure max	500 bar
flow	40-100 l/min
washing cycle time	4.8 min
min. pass-through hole dia.	120 mm (manual)
water inlet	1/2" G
inlet filter	700 micron
material	INOX
seals	NBR
nozzle size	1/8" G SPACIAL
nozzles positions	2 - 4
weight	9.5 Kg

FLOW L/MIN	DIFFUSER POSITION			
	1	2	3	4
40	13	6		
60		15	7	
80			12	7
100			16	10

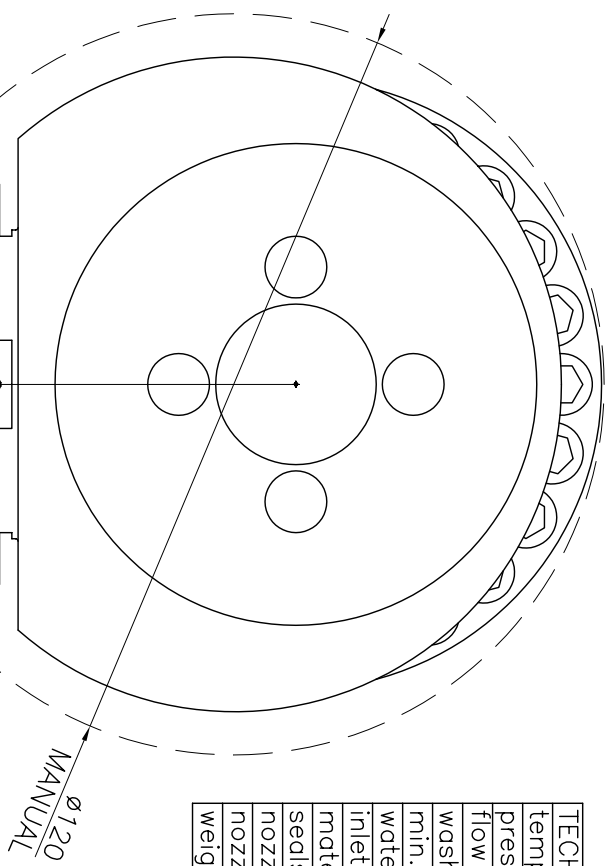

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
GREZZO	FOGLIO	XXXX				
~ = √	DATA	XX.XX.XX				
SGROSS: 3.2/	TOLLERANZE GENERALI classe m UNI-EN 22768/1					
∇ = 3.2/	0-+6 6-+30 30-+120 120-+400 400-+1000 1000-+2000					
FINITURA 1.6/	NOTE:					
RETTIFICA 0.8/	±0.1 ±0.2 ±0.3 ±0.5 ±0.8 ±1.2					
∇∇∇ = 0.8/	DESCRIZIONE: MW 510 A					
	INSTALLATION DRAWING					
	CODICE: MW 510 A					
	SCALE 1:1 A4 O					
	DISIGN.: CR I CONTR.: DM					
	DATA: 11.06.10 MOD.					
	MONTECCHIO E. (RE) - ITALY					
	CLEANING HEADS					
	Bonomaff					